STOPPY B

Complete range of automatic electromechanical retractable bollards for the protection and safety of all areas that require controlled access.
Shaft height 500 and 700mm. Ideal for collective use.

DIMENSION (MM)

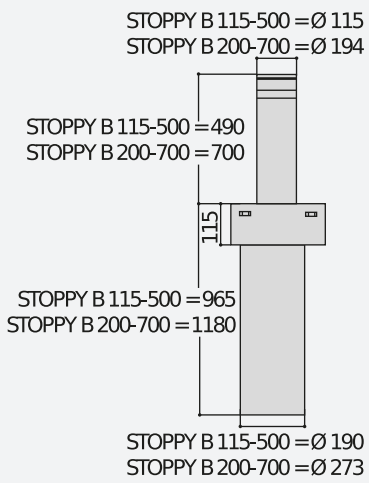

TECHNICAL FEATURES

	STOPPY B 115/500	STOPPY B 200/700
Control unit	PERSEO CBD	
Power supply	230 V	230 V
Power input		
Opening or closing	7 s	9 s
Rod height	500 mm	700 mm
Rod diameter	115 mm	200 mm
Type of limit switch	REED magnetic sensor	REED magnetic sensor
Slowdown	Yes	Yes
Impact resistance	6000 J	6000 J
Break-in proof	60000 J	60000 J
Manual cycle	reversible in the absence of voltage	reversible in the absence of voltage
Frequency of use	Semi intensive	Semi intensive
Protection rating	IP67	
Environmental conditions	-20 ÷ 60 °C	

		Description
P970088 00001	**STOPPY B 115/500**	Electromechanical bollard 230 V with shaft diameter 115 mm and height 500 mm. Impact resistance 6000 J. Slowdown in opening and closing.
P970089 00001	**STOPPY B 200/700**	Electromechanical bollard with shaft diameter 200 mm and height 700 mm. Impact resistance 6000 J. Version with LED light cap. Foundation box included. Available with light crown.

PERSEO CBE 230.P SD: Control unit with U-Link, receiver and incorporated heating circuit (to -40°C) for electro-mechanical and hydraulic bollards. Can manage up to 4 bollards at the same time (or up to 2 Xpass 1200).

D113812 00002 - PERSEO CBE 230.P SD - Recommended

- Control unit with U-Link, receiver and incorporated heating circuit (to -40°C) for electro-mechanical and hydraulic bollards
- Can manage up to 4 bollards at the same time (or up to 2 Xpass 1200)
- Application: Control panel for operating 1 to 4 automatic bollards, single-phase (in parallel) (or max
- 2 XPASS B 330/1200)
- Board power supply: 230V single phase
- Output power: 230Vac single-phase, 12A max
- Main features: removable terminal blocks, digital programming, 3-digit display, Proxima programmer connector, dual-channel receiver 2048 codes included, heater for operation to -40°C, complete support for anti-terrorism bollards, 11 inputs, 9 outputs
- Main features: U-Link interconnectivity, automatic reclosing, separate open and close, pre-flashing, deadman control, automatic or semi-automatic, opening and closing limit switch management, arranged for UPS

RECOMMENDED ACCESSORIES

D113812 00002 - **PERSEO CBE 230.P SD**

Control unit with U-Link, receiver and incorporated heating circuit (to -40°C) for electro-mechanical and hydraulic bollards. Can manage up to 4 bollards at the same time (or up to 2 Xpass 1200).

P975005 - **BATT-EB**

Backup battery kit to allow bollards to stay up in case of no power.

P800040 - **TPF**

Foundation and anchor plate for totem.

P800108 - **TCAP**

Top covering without lights for elements of Totem.

P800115 - **BOLLARD CABLE EXT50**

Extra charge for 50 m cable for bollards (to be added to the 10 included into bollards).

P800114 - **BOLLARD CABLE EXT25**

Extra charge for 25 m cable for bollards (to be added to the 10 included into bollards).

D113705 - **ACOUSTIC DETECTOR**

Adjustable acoustic detector for sirens.

P111001 00003 - **RME 2**

230 V dual channel metal object detector with installation base.

D110926 00001 - **SPIRA 2X1**

Magnetic loop 2 x 1 m.

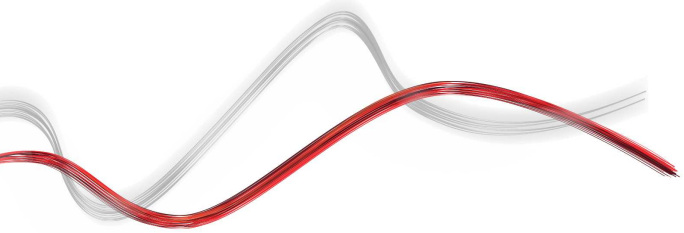

www.bft-automation.com

INFORMATIVA A TUTELA DEI DIRITTI DI PROPRIETA' INDUSTRIALE E INTELLETTUALE DI BFT. BFT S.p.A. tutela i propri diritti di proprietà industriale attraverso il deposito di marchi, brevetti, modelli e design. La proprietà intellettuale di BFT S.p.A. è tutelata a norma della legge sul diritto d'autore. BFT S.p.A. tutela inoltre il proprio know-how adottando misure di protezione delle informazioni tecniche e commerciali inerenti la propria azienda e i propri prodotti. Tutti i prodotti presenti in questo catalogo sono MODELLI ORIGINALI BFT e BFT S.p.A. è la sola autorizzata a produrli e commercializzarli in tutto il Mondo. Tutti i nomi commerciali attribuiti ai prodotti presenti in questo catalogo sono di titolarità di BFT S.p.A. che è la sola autorizzata al loro uso in relazione alla relativa categoria merceologica. I CONTRAFFATTORI VERRANNO PERSEGUITI A NORMA DI LEGGE SIA IN SEDE CIVILE CHE PENALE. IL TUTTO A GARANZIA NON SOLO DEL PATRIMONIO INTELLETTUALE DI BFT, MA ANCHE A TUTELA DEI CLIENTI CHE ACQUISTANDO PRODOTTI BFT ACQUISTANO PRODOTTI ORIGINALI FRUTTO DI STUDI E PROGETTI INTERNI ALLA SOCIETA' BFT.